

Figure 2: Layout of Y-Serpentine Model of 4-way WPD

Both the T and Y-Serpentine Models are designed using 1:2 Wilkinson Power Divider. The detailed dimensioning of 2-way WPD section is presented in table 1.

Table 1: Physical Parameters of t and y-serpentine models

Parameters (mm)	T-Model	Y-Model
a	2.37	2.37
b	1.97	1.97
c	1.18	1.18
d	0.79	0.79
e	4.9	10.98

### 3. Results and Discussion

Both the configurations are analyzed in MOM based electromagnetic solvers [9]. Structures are simulated on a high resistive silicon substrate ( $\rho > 8k\Omega$ ,  $h = 675\mu m$ ,  $\tan\delta = 0.001$  and  $\epsilon_r = 11.8$ ) for the frequency range of 1-3 GHz. RF performance of T-topology and Y-topology are shown in figure 3, 4 and 5 respectively. Table-2 summarizes the comparative performance study of both the configuration.

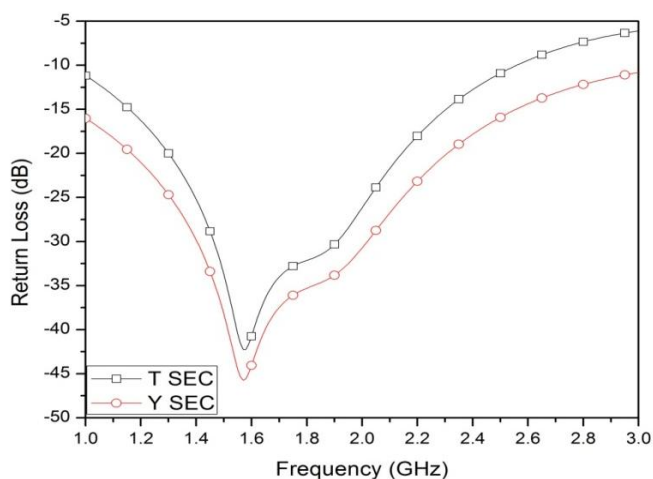


Figure 3: Return Loss characteristics

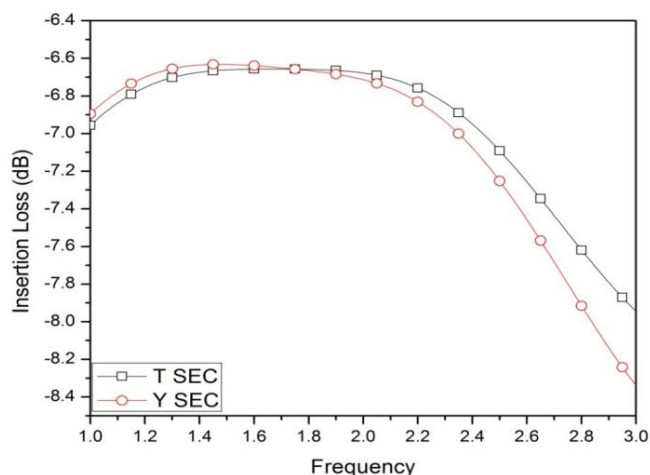


Figure 4: Insertion Loss Characteristics

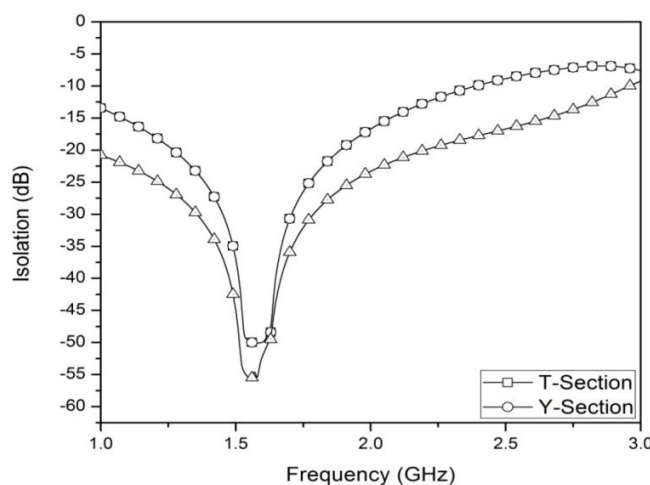


Figure 5: Isolation

Table 2: Comparison of Different 1:4 WPD Models

Parameters	T-Model	Y-Model
Operating frequency (GHz)	1.575	1.575
Return loss (dB)	-42.25	-45.75
Insertion loss (dB)	-6.66	-6.63
Isolation (dB)	-50.02	-56.28
Size (mm)	25.4×12.9	17×18.4

### 4. Conclusion

The two models of 1:4 Wilkinson Power Dividers have been analyzed and simulated. Y-Serpentine Model has high return loss as well as isolation in comparison to T-Serpentine Model. Also, the cover area of Y-Model is smaller than T-Model by  $14.8 \text{ mm}^2$ . So, in applications where high return loss, high isolation and smaller size is required, Y-Serpentine Model will be preferred. However, where output sections are required to be at right angles to the input section with moderate return loss and isolation values, T-Serpentine Model can be preferred. Overall, high return loss is desirable whereas the insertion loss and isolation loss should be a minimum value for power dividers. The analyses have shown that both the configurations satisfy the above constraints.

## References

- [1] E. J. Wilkinson, "An N-way Power Divider", IRE Trans. On Microwave Theory and Techniques, vol. 8, p. 116-118, Jan. 1960.
- [2] Kwok-Keung M. Cheng, Fai-Leung Wong, "A new Wilkinson power divider design for dual band application", IEEE Microw. And Wireless components letters, vol. 17,no.9, pp.664-666 ,September 2007.
- [3] D. M. Pozar, Microwave Engineering, Third Edition, John Wiley & Sons: New York, 2005.
- [4] Jong-Sik Lim, Sung-Won Lee, Chul-Soo Kim, Jun-Seok Park, Dal Ahn, and Sangwook Nam, "A 4 : 1 Unequal Wilkinson Power Divider", IEEE Microwave and Wireless Components Letters, Vol. 11, No. 3, March 2001.
- [5] Huang Guangpu, Qing Songlin, Fu Jeffrey, Kwang Lee Ching, "Design of Narrowband and Broadband Wilkinson Power Divider", Design and Innovation Project – School of Electrical & Electronic Engineering, Nanyang Technological University
- [6] T.C. Edwards, Foundations for Microstrip Circuit Design, John Wiley, 1992.
- [7] Taufiqurrachman, Hana Arisesa, "Design and Implementation of 2-Way Wilkinson Power Divider at Intermediate Frequency 456MHz using FR4 Substrate", International Journal of Engineering & Technology IJET-IJENS Vol: 12 No: 06, 2012.
- [8] Kamaljeet Singh , Ayan Karmakar, K Nagachenchaiah, "Dual-band (1:4) Wilkinson Power Divider on Silicon", Journal of Electronics, Vol. 1, No. 1, May 2012.
- [9] Advanced Design System (ADS) 2009- Agilent Systems

IJSER