

Bandwidth Optimization for Cognitive Radio Network via Spatial Coding in MIMO

Siva Rajasegaran¹, Vijayakumar P², Saminathan T³

¹Siva Rajasegaran, SRM University, Embedded System Technology, Kattankulathur, Chennai, India

²Project Guide, Asst Prof (Sr. Grade) SRM University, Chennai, India

³Guided by Mr. T. Saminathan, Asst Prof, SRM University, Chennai, India

Abstract: A cognitive radio (CR) is an intelligent radio that can be programmed and configured dynamically. This kind of radio automatically detects available channels in wireless spectrum, then make changes accordingly its transmission or reception parameters to allow more concurrent wireless communications in a given spectrum band at one location. With existing cognitive network, licensed primary users (PUs) can't work together with unlicensed secondary users (SUs) at the same frequency-time domain. SUs of cognitive network have to wait the frequency band occupied by PUs to be free. To solve the problem, a spatial coding approach for MIMO cognitive network, where a MIMO base-station with four antennas provides two different spatial codes for two users such as one PU and one SU, then the SUs can share the bandwidth of PUs. Agile & smart technology proposed by CR deal with the conflicts between spectrum congestion and under-utilization, which helps non-legitimate users to make use of licensed bands opportunistically using spatial coding & spatial multiplexing. The SDR hardware planned to use for this project is bladeRF_x40. It is a Software Defined Radio (SDR) platform designed to enable a community of hobbyists, and professionals to explore and experiment with the multidisciplinary facets of RF communication. It supports, 2x2 MIMO configurable with SMB cable, expandable up to 4x4, RF frequency range 300MHz - 3.8GHz, Stable Linux, Windows, Mac and GNU Radio software support, On-board 200MHz ARM9 with 512KB embedded SRAM (JTAG port available), On-board 40KLE or 40KLE Altera Cyclone 4 E FPGA (JTAG port available).

Keywords: Cognitive Radio, Cognitive Network, MIMO, Software defined Radio, Spatial coding

1. Introduction

In recent trends, CR has been proposed with agile and smart technology, which helpful for non-licensed users to make use of licensed bands opportunistically. CR can able to sense the unutilized spectrum and select the frequency in dynamic fashion and also control transmitted power. By doing the sharing of same radio channel, interference problem arise and it stand as obstacle to whole system throughput. With this paper, it is proposed to maximize the output of CR network without impacting the licensed primary users.

In normal scenario of application, Cognitive Network (CN) coexists with PUs in the same area. SUs can make use of bandwidth, if PUs doesn't occupy the bandwidth, to exhibit low power. In the scenario of simultaneous operation of PUs & SUs at same frequency, two types of interference would be generated. One type is the interference from SUs towards PUs and the other is from PUs towards SUs. As the PUs is licensed, they always have higher priority in the bandwidth usage compared with SUs. The important challenge is to protect PUs from the interference created by SUs if both are operating simultaneously at same frequency. Solutions can be found to overcome the interference problem.

With the available CR option, the sub-carrier of SUs had to switched off, so that, it would not make interference impact with PUs. By making spatial coding approach in MIMO of CR network, it is proposed to ensure PUs and SUs can work at same bandwidth and SUs need not switched-off. By using

proposed approach, SUs can make use of PUs band for their data transmission and both need not interfere with each other data transmission. The proposed spatial coding approach of CR network shares IA technique which helps PUs & SUs can work simultaneously with same frequency. Proposed spatial coding techniques is mainly depends on linear pre-coding at transmitters and no pushing at the receivers, so to move with this option, channel knowledge to be known exactly.

2. Base-Band System for MIMO-CR

2.1 Downlink BASE-BAND

A downlink base-band system with one base-station (BS) and three mobile stations (MSs) is considered as shown as in Figure.1. Assumption is made that, MIMO channel is time varying and channel coefficient is acquired by spatial multiplexing, by doing so channel matrix is well known perfectly.

In Figure.1, six antennas are equipped with BS transmitter and three MS receivers are equipped with two antennas each. The BS transmitter provides three spatial coding flows $K_m C_m$, $m=1, 2, 3$ from is three groups of antennas, each group has two antennas. C_m represents signal from antenna group m and pre-coding vector is represented by K_m ($m=1, 2, 3$) at the antenna group m , as it is nothing but 2×1 vector.

The m^{th} ($1 \leq m \leq 3$) receiver signified signal along with interference from other Base Station transmitter antenna group n ($n \neq m$)

$$\mathbf{q}_m = \mathbf{H}_{mm} \mathbf{K}_m \mathbf{C}_m + \sum_{n=1, n \neq m}^3 \mathbf{H}_{mn} \mathbf{K}_n \mathbf{C}_n + \mathbf{r}_m \quad (1)$$

Where \mathbf{H}_{mn} is a 2×2 channel matrix of the communication link between Master Station receiver m and antenna group n , and also, it is interfering link between antenna group n and unexpected receiver m . Radio frequency front end receiver m generating random noise \mathbf{r}_m and \mathbf{r}_m denoted by 2×1 additive noise vector and it is assumed as i.i.d. Gaussian distribution with zero mean and σ^2 variance.

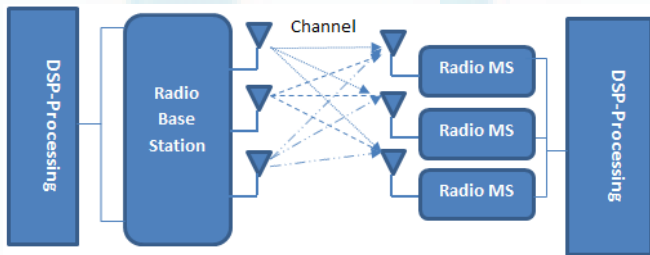


Figure 1: Downlink base band system for CR-MIMO

The proposed pre-coding vector is a kind of spatial codes, which let multi-users' interference to be cancelled at the receivers. In other words, Base Station in Fig. 1 constructs pre-coding vector \mathbf{K}_m , $m=1,2,3$ to encode the transmitting signals \mathbf{C}_m , $m=1,2,3$ and decoding vector \mathbf{j}_m , $m=1,2,3$ for Master-Stations to decode the signal at MS receivers.

The intended pre-coding vector \mathbf{K}_m , $m=1, 2, 3$ and decoding vector \mathbf{j}_m , $m=1,2,3$ should satisfy the following constraints:

$$\mathbf{j}_m^H \mathbf{H}_{mn} \mathbf{K}_m = 0, \forall m \neq n \quad (2)$$

$$\text{rank}(\mathbf{j}_m^H \mathbf{H}_{mn} \mathbf{K}_m) = 1 \quad (3)$$

The Mobile Station (MS) receiver m would get its needed signal from Base Station by multiplying it decoded vector \mathbf{j}_m^H .

The decoded signal Z_m at receive m can be obtained by $\mathbf{j}_m^H \mathbf{q}_m$.

$$\mathbf{y}_m = \mathbf{j}_m^H \mathbf{q}_m = \mathbf{j}_m^H \mathbf{H}_{mm} \mathbf{K}_m \mathbf{C}_m + \sum_{n=1, n \neq m}^3 \mathbf{j}_m^H \mathbf{H}_{mn} \mathbf{K}_n \mathbf{C}_n + \mathbf{j}_m^H \mathbf{r}_m \quad (4)$$

Precoded vector can be generated with equations (1) and (4). By solving equations with respective values, we can get respective matrix of precoded vector.

2.2 Uplink BASE-BASE

As like downlink base-band system shown in Fig.1, a MIMO CR uplink base band systems are shown in Fig.2.

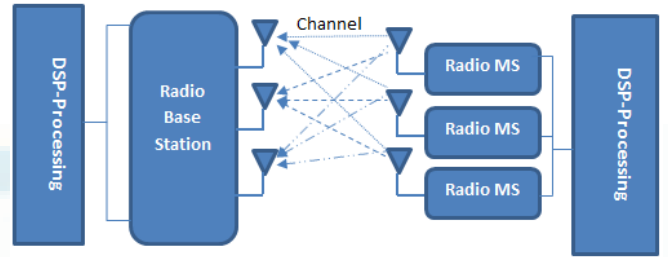


Figure 2: Uplink base band system for CR-MIMO

The MS transmitters provide three spatial coding flows, $\mathbf{K}_m \mathbf{C}_m$, $m=1,2,3$ from their antennas, \mathbf{C}_m represents the signal from mobile station m and \mathbf{K}_m , $m=1,2,3$ represents the precoded vector at mobile station "m" and it is nothing but 2×1 vector. BS divides its six antennas into three groups. The m^{th} ($1 \leq m \leq 3$) receiver signified signal along with interference from other Base Station transmitter antenna group n ($n \neq m$). The base-band system model in Fig. 2 at certain time instance is expressed by

$$\mathbf{q}_m = \mathbf{G}_{mm} \mathbf{K}_m \mathbf{C}_m + \sum_{n=1, n \neq m}^3 \mathbf{G}_{mn} \mathbf{K}_n \mathbf{C}_n + \mathbf{r}_m \quad (5)$$

Where \mathbf{G}_{mm} is 2×2 channel matrix of link between antenna group m and the transmitter of mobile station n and \mathbf{G}_{mn} is the interfering link between antenna group m and unexpected receiver n . Radio frequency front end receiver m generating random noise \mathbf{r}_m and \mathbf{r}_m denoted by 2×1 additive noise vector and it is assumed as i.i.d. Gaussian distribution with zero mean and σ^2 variance.

The intended mobile station encoding vector \mathbf{K}_m ($m=1, 2, 3$) and the base station decoding vector \mathbf{j}_m , $m=1,2,3$ have to satisfy the condition,

$$\mathbf{j}_m^H \mathbf{G}_{mn} \mathbf{K}_m = 0, \forall m \neq n \quad (6)$$

$$\text{rank}(\mathbf{j}_m^H \mathbf{G}_{mn} \mathbf{K}_m) = 1 \quad (7)$$

The BS receiver antenna group m can get its expected signal from BS by multiplying it's decode vector \mathbf{j}_m^H .

The proposed decoder for base station is represented by \mathbf{y}_m and the decoded signal at receiver m can be obtained by $\mathbf{j}_m^H \mathbf{q}_m$.

$$\mathbf{y}_m = \mathbf{j}_m^H \mathbf{q}_m = \mathbf{j}_m^H \mathbf{G}_{mm} \mathbf{K}_m \mathbf{C}_m + \sum_{n=1, n \neq m}^3 \mathbf{j}_m^H \mathbf{G}_{mn} \mathbf{K}_n \mathbf{C}_n + \mathbf{j}_m^H \mathbf{r}_m \quad (8)$$

The decoded vector can be generated with equations (5) and (8). By solving equations with respective values, we can get respective matrix of decoded vector.

3.Result of Simulation

To obtain the simulation result, Nuand transmitter and receiver used in MIMO setup hardware kit. GNU radio and GRC(GNU Radio Companion) is used as simulation tool.



Figure 3: Nuand tool kit Tx/Rx

The output is simulated with two Nuand Tx/Rx boards, as in Fig.3, configured in MIMO setup. Two users, one primary user and one secondary user are transmitting at same center with random source and both users share the band-width. The secondary user can also transmit during the same time of primary user transmission. The output for both users is show in Fig.4 and Fig.5.

The primary user is name as User_A0 and the secondary user is name as User_B1. The transmitted data at same frequency by two user simultaneously and received at two different time slot are captured and shown in Fig.4 and Fig5. For simulation purpose, only one primary user and one secondary user is considered. It is the case study of conference paper submission of Ref [15].

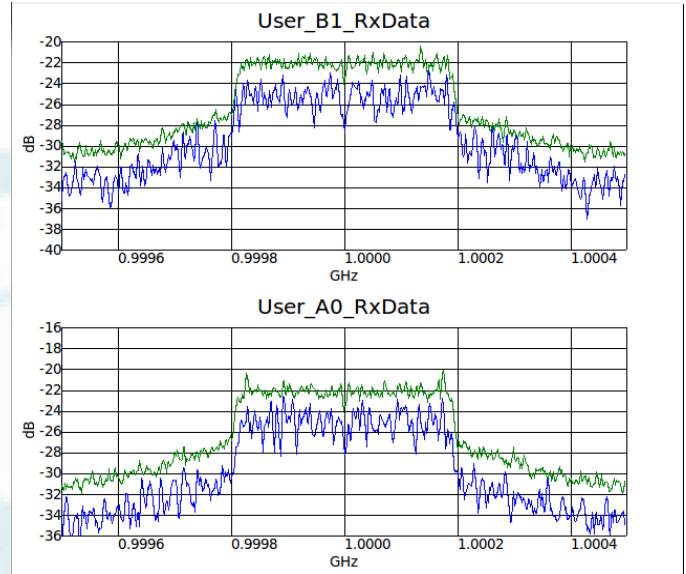


Figure 4: PU and SU Received output at time instance-1

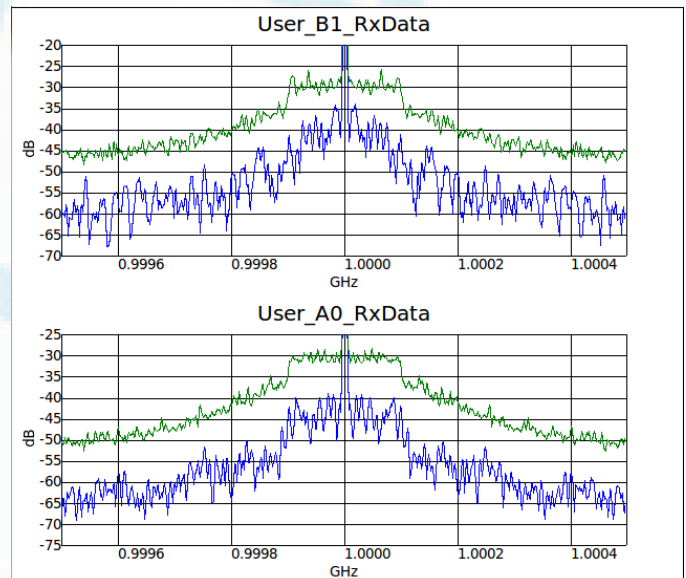


Figure 5: PU and SU Received output at time instance-2

Acknowledgment

My special thanks to Mr. Vijayakumar P & Mr. Saminathan T, whom they have sacrificed their valuable time & effort for guiding me in appropriate way to achieve the completion of this paper in success manner. I extend my heartfelt gratitude and thanks to all persons, who are all supported me to achieve this paper completion and to evolve in right direction.

References

- [1] Federal Communications Commission, "Spectrum Policy TaskForce," Rep. ET Docket no. 02-135, Nov. 2002.
- [2] J. Mitola and G. Q. Maguire, "Cognitive radio: making softwareradios more personal," IEEE Personal Commun., vol. 6, pp. 13-18, Aug. 1999.
- [3] T. A. Weiss and F. K. Jondral, "Spectrum pooling: an innovativestrategy for the enhancement of spectrum

- efficiency," IEEE Commun. Mag., vol.42, pp. S8-14, Mar. 2004.
- [4] Y. Xiao, K. S. Kim, G. Z. Qu. A Cognitive Spatial Multiplexing Scheme for MIMO-CDMA Networks[C]. Proc. of Conference on Wireless, Mobile and Multimedia Networks, Beijing, China, 2010: 147-150.
- [5] Y. Xiao, Y. K. Zhang, G. Z. Qu, et al. Spatial Multiplexing Algorithms of Cognitive Base-Stations[C]. Proc. of Conference on Wireless, Mobile and Multimedia Networks, Beijing, China, 2010: 221-224.
- [6] Hamdi, K.; Wei Zhang; Letaief, K.; , "Opportunistic spectrum sharing in cognitive MIMO wireless networks," IEEE Transactions on Wireless Communications, vol.8, no.8, pp.4098-4109, August 2009.
- [7] S. Haykin, "Cognitive radio: brain-empowered wireless communications" IEEE Trans. Selected Areas in Communications, Vol.23, No. 2, pp. 201-220, 2005.
- [8] H. Zamiri-Jafarian, M.A. Jannat-Abad, "Cooperative Beamforming and Power Allocation in the Downlink of MIMO Cognitive Radio Systems," Vehicular Technology Conference Fall (VTC 2010-Fall), 2010 IEEE 72nd, vol., no., pp.1-5, 6-9 Sept. 2010.
- [9] M. Maddah-Ali, A. Motahari, and A. Khandani, "Signaling over MIMO multi-base systems: Combination of multi-access and broadcast schemes," in Proc. IEEE Int. Symp. Information Theory (ISIT), Seattle, WA, USA, July 2006, pp. 2104–2108.
- [10] R. Tresch, M. Guillaud, E. Riegler, "On the achievability of interference alignment in the K-user constant MIMO interference channel," IEEE/SP 15th Workshop on Statistical Signal Processing, (SSP '09), pp.277-280, 2009.
- [11] O. El Ayach; S. W. Peters, R. W. Heath, "Real world feasibility of interference alignment using MIMO-OFDM channel measurements," Military Communications Conference, 2009. MILCOM 2009. IEEE, vol., no., pp.1-6, 18-21 Oct. 2009.
- [12] Tiangao Gou and Syed A. Jafar, "Degrees of Freedom of the K-User $M \times N$ MIMO interference Channel," 42nd Asilomar Conference on Signals, Systems and Computers, 2008, pp.126-130.
- [13] Krishna Gomadam, Viveck R. Cadambe, and Syed A. Jafar, "Approaching the Capacity of Wireless Networks through Distributed Interference Alignment," IEEE Global Telecommunications Conference, 2008, pp.1-6.
- [14] Y. Xiao, J. L. Liu, H. J. Yin, Kim Kiseon, MIMO Spatial Multiplexing Systems with Uplink Pilot and LDPC Codec, 5th International Conference on Wireless Communications, Networking and Mobile Computing, pp 1272-1276, Beijing, 2009.
- [15] Yanru Qiao, Yang Xiao, A Spatial Coding Approach for MIMO Cognitive Radio Networks' Bandwidth Sharing, Proceedings of the 2013 International Conference on Electronics and Communication Systems. Beijing, 2013