

# Studies on Teak Leaves (*Tectona Grandis*) as Low - Cost Adsorbent for the Treatment of Detergent Industrial Waste Water

Saravana Velan Rajendiren<sup>1</sup>, Govindaradjane Soupramaniane<sup>2</sup>, Pradeepkumar Sugumar<sup>3</sup>

<sup>1</sup>PG Student, Department of Civil Engineering, Pondicherry Engineering College, Puducherry-14, India

<sup>2</sup>Professor, Department of Civil Engineering, Pondicherry Engineering College, Puducherry-14, India

<sup>3</sup>Doctoral Research Scholar, Department of Civil Engineering, Pondicherry Engineering College, Puducherry-14, India

**Abstract:** *The present study aims to reduce the contaminants, mainly phosphate present in detergent industrial wastewater by using indigenously available natural resources such as teak leaves (*Tectona Grandis*) as a low-cost adsorbent. The physical and chemical characteristics of teak leaves adsorbent were analyzed such as particle size, surface area, etc. Further, characteristics of detergent wastewater were also studied to find out the contaminants level. Herewith, the adsorption study was conducted on fundamental parameters such as pH, dosage and contact time etc. From the above study and obtained results, it has been found that the percentage adsorption of phosphate from detergent wastewater such as 91.41% was achieved for 6gm of activated teak leaves adsorbent within 1 hour at pH 2 and COD was removed about 92.2 % using teak leaves as adsorbent which was another important issue which was addressed. Overall, the conducted study confirms the benefits for the sake of whole environment.*

**Keywords:** Activated Carbon, Low-Cost Adsorbent, Phosphorous, Teak Leaves Activated Carbon, Teak Leaves

## 1. Introduction

Industrialization is the backbone for the development of any country, but pollution caused by industries has become a serious concern throughout the world [1]. The increasing demand increases the production which in turn produces a huge quantum of effluents which are highly toxic and deleterious. The pollutants were ubiquitous at present situation and their treatment has to be given prime importance. Of all industrial sectors, the domestic products such as soaps, detergents, and food sector are the one which consumes the highest quantity of water and it is also one of the biggest producers of effluent per unit of production. Soaps and detergents were inevitable in households. The disposal of streams containing hazardous heavy metals into the environment has made the governments impose stringent standards for waste management [2].

Soap is a cleansing agent created by the chemical reaction of a fatty acid with an alkali metal hydroxide. Water-soluble sodium or potassium salts of fatty acids made from fats and oils, or their fatty acids, by treating them chemically with a strong alkali. It has the general chemical formula RCOOX. Three main components of soap by both cost and volume are oils, caustic and perfumes. Anionic surfactants are the major class of surfactants used in detergent formulations and represent about 59 % of surfactants used [3].

The waste effluent from soap industry was very rich in various parameters such as pH, TDS, COD, BOD, DO, Colour etc as their ranges were in effluent level. [1], [29], [34]. Surfactant wastewater was treated by biological processes such as activated sludge process which was problematic due to the low kinetics of degradation and to foam production and it was treated by various processes such as flocculation, coagulation, nano-filtration, ion exchange, and ozonation [40]. Sometimes adsorption (adsorbent bed)

was used as post-treatment process which effectively removes non-biodegradable non-ionic and anionic surfactants [28]. Phosphorus is produced in large quantities from various industrial productions, agricultural and mining activities [18], [21], [22]. P is an essential nutrient for the growth of biological organisms [3]. But Phosphorus present in high quantity will lead to the eutrophication of the receiving water bodies [4] and water quality deteriorates [5]. So, the removal of phosphorus is a major concern in recent decades [12], [13]. And it is the crucial solution for the enrichment of aquatic growth [30]. Various treatment technologies such as physical, chemical and biological are used in the past [26], [24]. Those treatments such as electrodialysis, membrane, conventional ASP, reverse osmosis and chemical precipitation [31], [33], [34]. But their economic viability and sludge associated with process such chemical precipitation Phosphorus, generally in the form of phosphates, has historically been one of the main ingredients in detergents (which are soaps made from synthetic materials) In the detergents, phosphates served as a "builder" to improve the detergent's cleaning efficiency. Builders, such as STPP (Sodium Tri Poly Phosphate), are important to the cleaning process, as they help to remove dirt from the clothes and to minimize soap scum (often seen as a ring on the tub, washing machine, or shirt collars) [36]. The need for builders in detergents and soaps is especially important in areas with "hard" water that contain calcium and magnesium ions, since the builders prevent these ions from interfering with the cleaning process [38]. Their strong cleaning performance, however, has increasingly been overshadowed by their harmful effects on rivers, lakes, streams, and other fresh waters. Levels of phosphates in these fresh water bodies can be much higher than normal as the result of contamination from municipal and domestic wastewater that contains phosphate [37].

Adsorption has been used as a physicochemical process over the last decades. In adsorption, molecules diffuse through the bulk of fluid to the surface of the solid adsorbent and form a

distinct adsorbent phase. Physisorption and Chemisorption are two type of adsorption in which the adsorbate adheres to the surface only through Van der Waals and through the formation of a chemical bond respectively [18]. However, commercially available activated carbon which is widely used as the adsorbent is expensive [28][29]. Higher production cost and regeneration difficulties make them unviable and made way to research on the use of non-conventional low-cost adsorbents such as neem leaves, sawdust, and teak leaves. Researchers have studied the production of activated carbon from plum kernels, cassava peel, bagasse, jute fiber, rice husks, olive stones, rice bran, date pits, fruit stones, and nutshells are very effective [21][22].

Low-cost adsorbents were engaged for the treatment of the waste streams. The abundant availability and their regeneration trends make them most astute adsorbent. With a view to developing teak leaf as an adsorbent, various factors back it up such as the insoluble wall where adsorption takes place was made of cellulose, lignin, condensed tannins and structural proteins which support adsorption [34]. In previous, teak leaf was used for the treatment of various pollutant such as heavy metal (Pb, Cu, Cr, Cd, Zn) [20] and dyes (MB and MG) [6], [14], [17], [19]. The adsorptive characteristics of teak leaves are expected to be highly effective [20].

**2. Materials and Methods**

**2.1 Preparation of Adsorbent**

Teak leaves were collected from PEC campus and they were thoroughly washed using distilled water to remove dust particles and they were sun dried to attain deep brown color which was brittle and crisp. A Huge quantity of leaves was collected as it yields a very low quantity of end product [24][8].

Teak leaves were crushed using domestic mixer into a fine powder, and they were sieved using a 355µ sieve and particles pass through was again sieved ina150µ sieve. Finally, it was sieved using a 75µ sieve [33]. The particles which pass through 75µ sieve collected and its quantity was about 1 - 5 % of the initial quantity of collected teak leaves.



**Figure 1:** Powdered Teak



**Figure 2:** Activated Teak Leaves

**Leaves**

Sieved Teak leaf powder was repeated washed to remove dust and impregnated with 0.1N of nitric acid to remove impurities and it was washed with distilled water. It was kept in the hot air oven at 101°C for 1 hour, and it was taken out from the oven and kept in the muffle furnace till it reaches 410°C. Then it was taken back from the oven. The contemplation of the dark black colour powder from brown colour indicates that it was carbonized. It was washed and filtered to remove the acid [13], [25].

**Table 1:** Characteristics of adsorbent

| Sl. No. | Parameters                 | TLAC       |
|---------|----------------------------|------------|
| 1       | pH                         | 6.7        |
| 2       | EC                         | 140.8µs    |
| 3       | TDS                        | 92.6 mg/l  |
| 4       | Moisture Content , %       | 0.93       |
| 5       | Ash Content, %             | 2.16       |
| 6       | Matter soluble in water, % | 1.81       |
| 7       | Matter soluble in acid, %  | 4.60       |
| 8       | Surface Area(BET)          | 117.63m2/g |
| 9       | Temperature                | 29°C       |
| 10      | pH                         | 6.7        |

**Table 2:** Characteristics of Raw Effluent

| Sl. No. | Parameter   | Result       |
|---------|-------------|--------------|
| 1       | pH          | 5.56         |
| 2       | TDS         | 1680 mg/l    |
| 3       | EC          | 1.67ms@ 20 C |
| 4       | Temperature | 32° C        |
| 5       | COD         | 3126 mg/l    |
| 6       | Phosphorus  | 57.6 mg/l.   |

**2.2. Experimental Procedure**

The wastewater sample from soap and detergent industry will be collected and it was subjected to the various laboratory tests, characterized, tabulated and was checked with permissible standards to evaluate the level of pollutant [35] [36].



Figure 3: Batch Setup

The Soap and detergent waste water sample of 100 ml was measured and will be taken in a 500 ml Erlenmeyer’s flask and the stir bar was inserted into it and the setup was placed on the magnetic stirrer [23]. Then, the teak adsorbent of required dosage was added to it and the magnetic stirrer was switched on for a thorough mixing of the sample with the adsorbent. The treatment of the wastewater using the adsorbent will be carried out and the effectiveness will be studied by varying the dosage of the adsorbent and the detention periods.

In this study, SIX levels of dosages, namely 0.5g, 1.0g, 2g, 3.0g, 4.0g, 5.0 g and 6.0g and FOUR durations of detention levels, namely, 1, 2, 3 hours will be analyzed. [7], [15]. The results from the above combinations were analyzed to understand the effectiveness of the treatment process and to sort out the optimum / desirable dosage and detention time [43]. Then, the treated samples will be filtered using the Whatman filter paper, thus removing the adsorbent particles from the treated sample. Then the treated sample will be analyzed for the parameters such as pH, EC, TDS, and COD [9], [10], [42].

### 3.Results and Discussion

Table 3: Effect of Contact Time

| S. No | Contact Time (min) | Phosphate Present in Effluent post treatment (mg/l) | Removal Efficiency (%) |
|-------|--------------------|---|------------------------|
| 1     | 30                 | 31.8  | 40.12                  |
| 2     | 45                 | 21.6  | 62.5                   |
| 3     | 60                 | 4.64  | 91.4                   |
| 4     | 90                 | 11.74   | 79.8                   |
| 5     | 120                | 16.12   | 72.01                  |
| 6     | 150                | 17.16   | 70.2                   |
| 7     | 180                | 18.32   | 68.1                   |

Table 4: Effect of Dosage

| S. No | Dosage (g) | Initial Phosphate Conc. ( mg/l) | Phosphate Present in Effluent After Treatment ( mg/l) | Removal Efficiency % |
|-------|------------|---------------------------------|---|----------------------|
| 1     | 0          | 57.6                            | 57.6  | 0                    |
| 2     | 0.5        | 57.6                            | 34.8  | 39.5                 |
| 3     | 1          | 57.6                            | 23.43   | 59.3                 |
| 4     | 2          | 57.6                            | 19.62   | 64.2                 |
| 5     | 3          | 57.6                            | 15.54   | 71.28                |
| 6     | 4          | 57.6                            | 11.96   | 79.2                 |
| 7     | 5          | 57.6                            | 7.83  | 86.4                 |
| 8     | 6          | 57.6                            | 4.64  | 91.4                 |

Table 5: Effect of pH

| S. No | pH                                      | Phosphate Present in Effluent post treatment (mg/l) | Removal Efficiency (%) |
|-------|---|---|------------------------|
| 1     | Initial Level (5.5) (Without Treatment) | 57.6  | 0                      |
| 2     | 5.5                                     | 34.8  | 39.5                   |
| 3     | 2                                       | 4.64  | 91.4                   |
| 4     | 4                                       | 21.45   | 62.7                   |
| 5     | 7                                       | 35.6  | 38.1                   |
| 6     | 10                                      | 37.2  | 35.4                   |
| 7     | 12                                      | 39.45   | 31.5                   |

Table 6: Effect on COD

| S. No | Dosage (g) | COD Present in the Influent | COD Present in Effluent post treatment (mg/l) | Removal Efficiency (%) |
|-------|------------|-----------------------------|---|------------------------|
| 1     | 0.5        | 3126                        | 2146  | 31.3                   |
| 2     | 1          | 3126                        | 1271  | 59.3                   |
| 3     | 2          | 3126                        | 791   | 74.7                   |
| 4     | 3          | 3126                        | 640   | 79.5                   |
| 5     | 4          | 3126                        | 536   | 82.8                   |
| 6     | 5          | 3126                        | 391   | 87.4                   |
| 7     | 6          | 3126                        | 243   | 92.2                   |

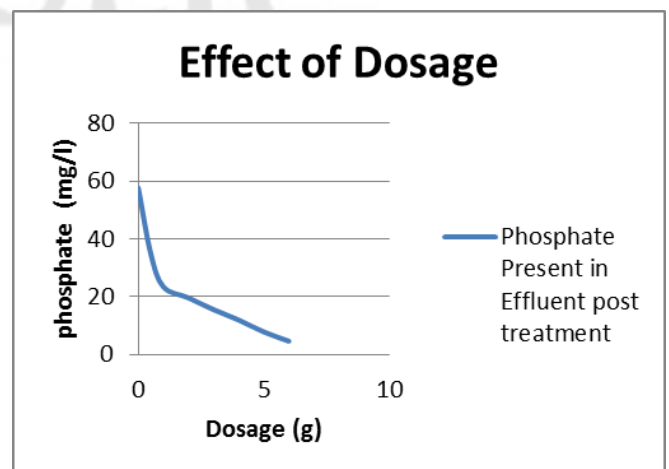


Figure 3: Dosage vs. Phosphate

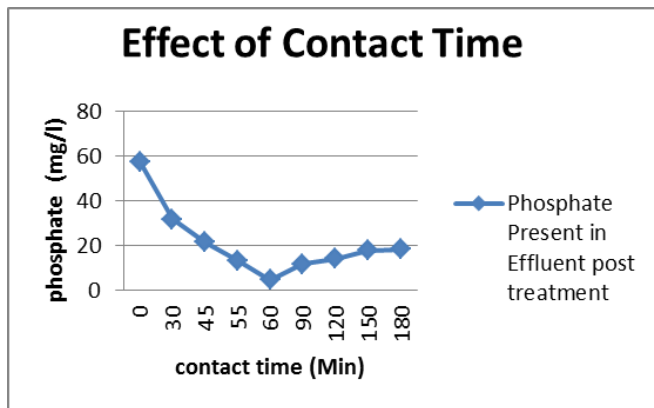


Figure 4: Contact Time vs Phosphate

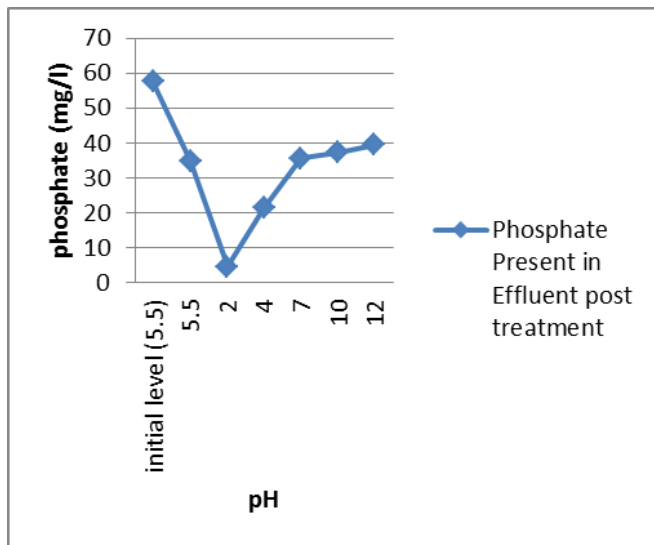


Figure 5: pH vs Phosphate

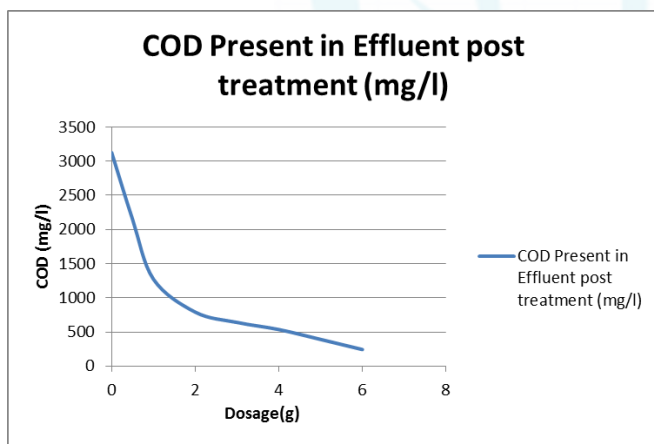


Figure 6: Dosage vs COD

**3.1 Effect of Dosage** - The graph (Fig 3) shows that the dosage increases with increase in removal of Phosphorus which was due to increase in binding sites of adsorbent. The decreasing trend slows down as the dosage increases because the system became bulky and this reduces flux of mixing.

**3.2 Effect of Contact Time** – Fig 4 reveals that the removal was very faster for period of ½ hour to 1 hour. After that period of time the decreasing trend reduces and the system reaches the breakthrough time at some point. After that period desorption occurs.

**3.3 Effect of pH** – The pH is important governing factor as it decreases the positive charge increase which in turn increases the adsorption of cations which pollutant possess. The surface charge decreases as pH increases so, the decreasing trend was followed till pH reaches 7 and after that adsorption decrease due to increase in negative charge.

**3.4 Effect of COD** – The COD present in the effluent decreases as the dosage of adsorbent increase which increases the binding sites and affinity. But, after certain period or optimum contact time the binding sited got reduced and the system became stable. Maximum of 92.2% removal efficiency was achieved using 6 g of adsorbent.

Soap and detergent wastewater tend to clog quickly and break through time will be believed to be quick in this process. To avoid that, coagulant will be used to remove the clog from the surface of the adsorbent. It will help to increase the removal rate and regeneration of adsorbent.

## 4. Conclusion

Teak leaves activated carbon (TLAC) found to be efficient through a deliberate literature survey. And they are equipped to treat the Detergent industry. The experimental procedure disclosed that the optimum level of treatment was found to be 6 g of adsorption for the treatment of 1 hour at pH 2. This treatment process help to achieve maximum efficiency with minimum energy requirement and expenses. This was the first time the phosphorus was emphasized and removed using teak leaves as adsorbent and about 91.4% was achieved about 4 mg/l of phosphate which was under the permissible limit of IS standards (5 mg/l). COD which is another important parameter was also treated and about 92.2% removal efficiency was achieved using 6g of adsorbent. Most importantly, Habitants and the surrounding environment will be benefited from the decrease or elimination of the potential toxicity due to the Phosphorus and other major pollutants.

## References

- [1] Aboulhassan M.A, Souabi S, yaacoubi A, Baudu M , Removal of surfactant from industrial wastewater by coagulation and flocculation process. Journal of Environment Science & Technology, 3(4), 327-332. 2006.
- [2] Akhila S.P, Naik M.M, Rao B.V.V, Removal of Cr (VI) from Aqueous Solution using Teak Wood Saw Dust, Proceeding of International Conference on Recent Trends in Transportation, Environmental and Civil Engineering. 2011.
- [3] Boob, S.D, Sonare, S.S, Solanki, P.R, Study of physico-chemical properties of effluents from soap industry in amravati. Scientific reviews and chemical communications, 240-243, 2012.
- [4] Chang, Chun, Chi, Huang, Yao, Hui, Phosphate. Adsorption and Recovery from an Industrial Wastewater
- [5] Chmielewska, Eva, Hodossyova, Renata, Bujdos, Marek, Kinetic and Thermodynamic Studies for Phosphate Removal Using Natural Adsorption Materials. Journal of Environmental Studies, 1307-1316, 2013.

- [6] Durrani G.F, Zahoor A, Baloch M.k , 2007, Studied on Analysis of physiochemical characteristics of industrial effluent of H.I.E (Haripur Industrial Estate), Haripur, Journal of Chemical Society, 29(4).
- [7] Eskandarpour, Akbar, Sassa, Kensuke, Bando, Yoshiyuki, Okido, Masazumi, Asai, Shigeo, 2006. Magnetic Removal of Phosphate from Wastewater Using Schwertmannite. Journal of Materials Transactions, 1832 to 1837.
- [8] Geetha K.S and Belagali S.L, Removal of Heavy Metals and Dyes Using Low Cost Adsorbents from Aqueous Medium-, A Review, Journal of Environmental Science, Toxicology and Food Technology, 4(3), 56-58, 2013.
- [9] Goswami A.K, Kulkarni S.J, Dharmadhikari K.S, Phutke M, Adsorption of Copper (II) ions from Synthetic Waste Water By Teak Leaves, International Journal of Science, Engineering and Technology Research, 2(6), 1356-1359, 2013.
- [10] Gunasekar V, Kumar S, Ponnusami V, Prediction of adsorption kinetic rate constant for removal of methylene blue using teak leaf powder, Asian Journal of Scientific Research, 7(3), 284-293, 2014.
- [11] Gupta, V.K, Sadegh, H, Yari, M, Ghoshekandi, Shahryari, R, Maazinejad, B, Chahardori, M, . Removal of ammonium ions from wastewater A short review in development of efficient methods. Global Journal of Environmental Science Management, 149-158, 2015.
- [12] Hamdi, Noureddine, Srasra, Ezzeddine. Removal of phosphate ions from aqueous solution using Tunisian clays minerals and synthetic zeolite. National Center of Research in Materials Sciences.2015.
- [13] Hena, Sufia, Atikah, Salwa, Ahmad, Harlina Ahmad, Removal of phosphate ion from water using chemically modified biomass of sugarcane bagasse. The International Journal of Engineering and Science, 51-62. 2015.
- [14] Indian standard, IS877: 1989 activated carbons, powdered and granular — methods of sampling and test.
- [15] Indian standard for Inland disposal: Maximum permissible limits for industrial effluent discharge. Central Pollution Control Board, Pollution Control Acts, Rules, and Notifications, issued under. Fourth edition pp. 358-359.
- [16] Jafar A. A. and Suganthana B, Adsorption of Pb(II) Ions on Teak Leaves Activated Carbon-A Kinetic and Equilibrium Study, Pelagia Research Library, 1(2), 35-43, 2010.
- [17] Jain A.P & Pandharipande S, Investigation & Comparative Study of Effectiveness of Adsorbent Synthesized from 'Tectonagrandis' seed in removal of Cr(VI) from aqueous solution, International Journal of Engineering Research and Application, 5(4), 116-120, 2015.
- [18] Jung, K.W, Hwang, M.J, Ahn, K.H, Ok, Y.S, . Kinetic study on phosphate removal from aqueous solution by biochar derived from peanut shell as renewable adsorptive Media. International journal of environmental studies, 3363–3372, 2015.
- [19] Kannan.N, Vijayakumar A, Subramaniam P, Studies on the Removal of Red Industrial Dye Using Teak Leaf, Maize Corn and Babool, Tree Bark Carbons –A Comparison, E-Journal of Chemistry, 7(3), 770-774, 2008.
- [20] King et al, Sorption of copper(II) ion from aqueous solution by Tectonagrandis.l.f. (teak leaves powder), Journal of Hazardous Materials, B136, 550-556, 2006.
- [21] Lakdawala, Milan, M, Patel, Yogesh, S, Studies on adsorption capacity of zeolite for removal of chemical and bio-chemical oxygen demands, 139-143, 2015.
- [22] Lee, Kwanyong, Jutidamrongphan, Warangkana, Lee, Seokwon, Park, Young, Ki, Adsorptive removal of phosphate from wastewater using mesoporous titanium oxide. Advances in civil, environmental, and materials research. 2016.
- [23] Maung S.S, Htwe T.T, Proposal of Wastewater Treatment Process and Design for Soap Industry, International Journal of Scientific Engineering and Research Technology, 3(10), 2052-2057, 2014.
- [24] Maeng, Minsoo, Lee Haegyun, Dockko, Seok, Phosphate removal using novel combined Fe-Mn-Si Oxide adsorbent. Journal of Korean society of water and wastewater, 631-639, 2013.
- [25] Mahajan, Chetan, S, Sarode, Dhananjay, B, Jadhav, Ramanand, N, Attarde, Sanjay, B, Ingle, Sopan, T, Removal of heavy metals from winery wastewater by using natural adsorbents. International journal of conservation science, 69-78, 2014.
- [26] Mishra Y , Soumya V, Shanthakumar S, Adsorption studies of basic dyes onto teak (tectonagrandis) leaf powder, Journal of Urban and Environmental Engineering, 9(2), 102-108, 2015.
- [27] Mohamed, Nouran, Yussri, Use of some industrial wastes and natural materials in phosphate removal from wastewater. Cairo University, 2012.
- [28] Narkis N and Weinberg H, Removal of Surfactants from Effluents, Umwelt Engineering, 400-405, 1989.
- [29] Naveen B.P, yaseen M, Dr. Goud B.S, Performance study on waste water treatment plant at Karnataka soaps and detergents limited. Proceeding of Second National Conference on Innovative Practices for Sustainable Energy and Waste Management, 125-132, 2009.
- [30] Nawar, N, Ahmad, M.E, Said, El, W.M, Moalla, S.M.N, Adsorptive removal of phosphorous from wastewater using drinking water treatment-alum sludge (DWT-AS) as low cost adsorbent, 79-85, 2015.
- [31] Nguyen, Nhat, Trung, Adsorption of phosphorous from wastewater onto biochar: batch and fixed-bed column studies. Heisinkimetroplia University of applied sciences. 2015.
- [32] Nguyen, Hang, An, Thi, Ngo, Hao, Huu, Guo, Wenshan, Nguyen, Vinh, Tiesn, Phosphorous Removal from Aqueous Solutions by Agricultural By-products: A Critical Review. Journal of Water Sustainability, 193–207, 2012.
- [33] Nur, Tanjina, Loganathan Paripurnanda, Kandasamy, Jaya, Vigneshwaran, aravanamuthu, "Phosphate Adsorption from Membrane Bioreactor Effluent Using Dowex 21K XLT and Recovery as Struvite and Hydroxyapatite" International journal of environmental research Public Health, 2016.
- [34] Rao K .S, Anand S, Venkateswarulu P, Adsorption of Cd(II) aqueous solution by tectonagrandis, Bioresources, 5(1), 438-454, 2010.

- [35] Ragheb, Safaa, M, Phosphate removal from aqueous solution using slag and fly ash. Journal of Housing and Building National Research Center, 270-275, 2013.
- [36] Ramakrishnaiah, C.R, Vismitha, Removal of phosphate from wastewater using low-cost adsorbents. International Journal of Engineering Inventions, 44-50, 2012.
- [37] Shah, Jyoti, Kumar, Sanjeev, Sharma, Sudha, Sharma, Rajeev, Removal of Nickel from aqueous solution by using low cost adsorbents: A Review. International Journal of Scientific Engineering and Applied Science (IJSEAS), 2395-3470, 2016.
- [38] Subha, E, Sasikala, S, Muthuraman, G, Removal of Phosphate from wastewater using natural adsorbents. International Journal of ChemTech Research, 3095-3099, 2015.
- [39] Tekade P.V, Mohabansi N.P, Patil V.B, Study of physico-chemical properties of effluents from soap industry in wardha , Journal of Rasayan, 4(2), 461-465, 2011.
- [40] Tripathi A, Ranjan M.R, Heavy Metal Removal from Wastewater Using Low Cost Adsorbents, Journal of Bioremediation and Biodgradation, 6(6), 1-5, 2015.
- [41] Upadhyay A & Upadhyay K, Treatability study of soaps and detergents industry waste water by Ozonation process, Journal of Industrial Pollution Control, 29(2), 251-258, 2012.
- [42] Xie, Fazhi, Wu, Fengchang, Liu, Guijian Liu, Mu, Yunsong, Feng, Chenglian, Wang, Huanhua, Giesy, John, P Removal of Phosphate from Eutrophic Lakes through Adsorption by in Situ Formation of Magnesium Hydroxide from Diatomite. Environmental science and technology, 582-590. 2014.
- [43] Yao, Ying, Inyang, Mandu, Zimmerman, Andrew, R, Cao, Xinde, Pullammanappallils, Pratap, Yang, Liuyan, Removal of phosphate from aqueous solution by biochar derived from anaerobically digested sugar beet tailings. Journal of Hazardous Materials, 501-507, 2011