

Experimental Analysis of Group Three Bent Pile with Respect to Different Density I.E. Loose, Medium and Dense of Cohesion Less Soil

Ravi Kumar

Department of Civil Engineering, Principal Government Polytechnic Katihar, Bihar, India

Abstract: All engineered construction resting on the earth must be carried by some kind of interfacing element called a foundation. The foundation is the part of an engineered system that transmits to, and into, the underlying soil or rock the loads supported by the foundation and its self-weight. The resulting soil stresses except at the ground surface are in addition to those presently existing in the earth mass from its self-weight. Piles are used to support the structures. Piles are frequently required because of the relative inability of shallow foundation to transmit inclined, horizontal, or uplift force and over-turning moments. Such situations are common in design of earth retaining structures and tall structures subjected to high wind and earthquake force. Considering importance and necessity of pile in construction work. This thesis is based on the piles and topic name "Experimental Analysis of group three bent pile with respect to different density i.e. loose, medium and dense of cohesion less soil". The main objective of thesis is to determine reduction in load carrying capacity due to bending of group bent pile and also to determine the load carrying capacity of bent pile with respect to different density i.e. loose, medium and dense of cohesion less soil. In the present study, the carrying capacity of pile shall be ascertained under different conditions of soil and bending. The effect of degree of bending shall be studied by at different angle of bend. The study shall be made only in cohesion less soil under different degree of compaction. The study is made on one type of pile material.

Keyword: Bent pile, loose, medium and dense of cohesion less soil, L/d Ratio

1. Introduction

Driving bearing piles to support the structures is one of the earliest examples of art and science of the civil engineers. Foundations may be classified based on where the load is carried by the ground:

Shallow foundations—termed bases, footings, spread footings, or mats. The ratio $D/B < 1$ but may be somewhat more.

Deep foundations—piles, drilled piers, or drilled caissons. $L_p/B > 4+$ with a pile

Need for a pile foundation can be justified in the following situation:

- Upper soil strata are too compressible or generally too weak to support the heavy vertical reaction transmitted by super structure.
- Piles are frequently required because of the relative inability of shallow foundation to transmit inclined, horizontal, or uplift force and over-turning moments. Such situations are common in design of earth retaining structures (walls and bulk-heads) and tall structures subjected to high wind and earthquake force.
- Horizontal forces are resisted either by vertical piles in bending or by groups of vertical and battered piles.
- Pile foundations are often required when scour around footing could cause erosion in spite of the presence of strong, incompressible strata (such as sand and gravel) at shallow depth.
- In areas where expansive or collapsible soils extend to considerable depth below the soil surface, pile foundation may be needed to assure safety against undesirable seasonal movements of the foundations

These piles are classified on following basis:

On the basis material:

- Timber
- Steel
- Plain cement concrete
- Reinforced cement concrete
- Pre-stressed
- Composite

On the basis of method of construction:

- Driven/ displacement precast piles
- Driven/ displacement cast in situ piles
- Bored/ replacement precast piles
- Bored/ replacement cast in situ piles

On the basis of sectional area:

- Circular
- Square
- Tubular
- Octagonal
- H-section

On the basis of load transfer:

- End bearing pile
- Friction pile
- End bearing & frictional pile

On the basis of size of pile:

- Micro/mini pile (<150mm)
- Small diameter pile (150mm< diameter < 600mm)
- Large diameter pile (>600mm)

On the basis of inclination of pile:

- a) Vertical piles
- b) Raker/batter pile

Principal advantages and disadvantages of different pile materials:

Material	Advantages	Disadvantages
Timber	Easy to handle or cutoff, relative inexpensive material, ready available, naturally tapered, light and very durable below ground level.	Decay above water table, especially in marine environment, limited in size and bearing capacity, prone to damage by hard driving, noisy to drive.
Steel	Easy to handle, cutoff, extend. Available in any length or size, can penetrate hard strata, boulder, soft rock. Convenient to combine with steel superstructure, ability to withstand hard driving, capable for heavy loads.	Subject to corrosion, require protection in marine environment. Flexible H-piles may deviate from axis of driving. Relatively expensive material than timber and concrete. Noisy to drive
Concrete precast	Durable in almost all environments. Convenient to combine with concrete superstructure	Cumbersome to handle and drive. Difficult to cutoff or extend. Noisy to drive.
Cast in situ	Allow inspection before concreting, easy to cutoff and extend	Casting cannot be reused, thin casing may be damaged by impact or soil pressure.

2. Review of Literature

Hanna (1963) reported the results of three tests on long H section steel piles driven through firm clays to bed rock at 44m depth. A Wilson slope indicator was used to determine the plan position of these piles with depth. In contrast to the pile bending observation of others these piles had two bends and the field observations are reproduced.

Berezantzev, Khristoforov, V. and Glubkov, V. (1961) made theoretical and experimental investigations on the load bearing capacity of single pile and group of piles in sand. They have developed a formula for load bearing capacity and settlement of pile foundation. The settlement was observed to be proportional to square root of the size of footing. Their work on pile groups and pile test demands that the design of pile foundation with free length of piles should be based on the analysis of deformation of frames with rigidly anchored struts.

Orrje, O. & Broms, B.B. (1967) studied the effects of pile driving on soil properties. They have concluded that

the undrained shear strength of clay is not affected appreciably by pile driving except possibly in the case when the spacing between the individual pile is small (Less than 4 pile diameter).

Johnson (1962) made field measurements on 27m long composite piles in sand and observed that the out-of-plan position of the pile base was of the order of approximately 10% of the pile length. Like parsons & Wilsons (1954) he presented a method of safe load estimation that depended on knowledge of the deflected shape of the pile and the load distribution along the pile shaft.

3. Experimental Investigation

General:

To proof the validity of the theoretical analysis an attempt has to be made to analysis the settlement behavior of initially bent piles and pile group in the laboratory under vertical load embedded in sand. An extensive experimental project has to be under taken to evaluate the extent of pile-soil-pile interaction. Emphasis on model test has to be found worth in enhancing an easy and rapid comparison of many combinations of variables. Therefore the principles of dimensional analysis is one of the most systematic approach to interpret ate the results to prototype.

In the present investigation, locally available Swarnrekha River sand will be used as soil medium and placement of soil has been made by rainfall method. The soil media will be chosen as loose, medium dense and dense by varying the height of fall of sand while filling the test tank. The behaviors of single wooden bent pile as well as bent piles in a group will be study in the laboratory. The group of piles may be extended to three, three, four and five pile groups respectively. Keeping in view the practical limitations viz. space, size of test tank, time allotted and other constraints, the pile bent will restricted to 0°, 6°, 15°, and 30° and space-diameter ration will be chosen for 2, 4, 6 and 8. The tests shall conduct under loose, moderately dense and dense state of soil medium. The entire tests will subject to vertical compressive load.

The following experimental program has to be made for undertaking this project. The entire program has to be divided qualitatively and quantitatively into the following major groups.

Three Group Piles						
Angle	L/d Ratio			Soil Medium		
0°	10	20	40	Loose	Medium dense	Dense
6°	10	20	40	Loose	Medium dense	Dense
15°	10	20	40	Loose	Medium dense	Dense
30°	10	20	40	Loose	Medium dense	Dense

Material Sand: Sand has to be chosen as soil medium for the tests because it is easy to handle and is free from time effects. Dry sand transported from Local River has to be

used. Various physical properties of sand have to be found by laboratory method.

Experimental set up: Experimental set up mainly consists of test tank, loading frame with loading arrangement, pile, pile group and pile caps for testing purpose and measuring devices.

Model piles: 5 Nos Straight piles $L/d = 10$
 5 Nos 6° Inclined piles $L/d = 10$
 5 Nos 15° Inclined piles $L/d = 10$
 5 Nos 30° Inclined piles $L/d = 10$
 5 Nos Straight piles $L/d = 20$
 5 Nos 6° Inclined piles $L/d = 20$
 5 Nos 15° Inclined piles $L/d = 20$
 5 Nos 30° Inclined piles $L/d = 20$
 5 Nos Straight piles $L/d = 40$
 5 Nos 6° Inclined piles $L/d = 40$ 5 Nos 15° Inclined piles $L/d = 40$
 5 Nos 30° Inclined piles $L/d = 40$

Hence 5 Nos cylindrical wooden piles of 0° inclination, 5 Nos cylindrical wooden piles of 6° inclination, 5 Nos cylindrical wooden piles of 15° inclination and 5 Nos cylindrical wooden piles of 30° inclination of length 300, 600, 1200 mm in length and 30 mm dia in section shall be made. Young's Modulus of elasticity of pile material has to be found.

Pile caps: Wooden pile caps have to be fabricated according to different group of pile spacing. Keeping in mind the practical limitations of size of the tank, capacity of loading mechanism, volume of sand to be handled following groups are decided for testing programme.

Group of 2 piles: Spacing- $2d$ Angle- $0^\circ, 6^\circ, 15^\circ, \& 30^\circ$
 Where d = diameter of the pile

Test Tank: A wooden tank of size 100 X 100 X 150 cm will be made with 6mm ply board and sufficiently stiffened with 2cm thick wooden plank and 7.5cm x 7.5cm asserted length of wooden runner to serve as a container of sand.

The size of tank will be chosen on the basis of following assumptions.

- (I) The intensity of stress at the base of tank due to the load on the pile should be small fraction of applied load (5%)
- (II) The dispersion planes of stress distribution should not interfere with the walls of the tank.

As the above conditions are satisfied, the sand contained in the tank can be treated as a semi-infinite cohesion less sand media.

Loading arrangements: The loading arrangement is shown in figure. The loading frame will composed of three vertical channels anchored at bottom. Three channels of the same section will be bolted at tip of the frame to mount screw jack with proving-ring. Load will be applied through a screw jack operated by a gear system. Load will

measured by a proving- ring. A Proving ring of required capacity will be used. The proving-rings having calibration 1 div = 1.447 kg will be used to apply load on single pile, group of 2 piles group, group of straight in nature and inclined in nature of $6^\circ, 15^\circ, \& 30^\circ$.

Measuring Devices: Load has to be measured by proving-ring and three numbers dial gauges of least count 0.01 mm will be used to measure the settlement of piles.

Placement of sand: As it is already been stated earlier that locally available river sand will be used as the soil medium and to maintain the same, placement density for each test while pouring the dry sand through hopper by rain fall method, the height of fall of sand is kept almost constant and the quantity of sand taken every time into hopper was also kept more or less constant to confirm the equal placement density of different layer of deposits, a penetrometer has been used to get the same penetration at each layer.

In the experimental work, three, type of sand deposits i.e. loose deposits, medium dense deposits and dense deposits shall be maintained. The corresponding relative densities shall be determined. The details of soil properties shall be presented. The angles of shear resistance from direct shear tests shall be determined for loose, medium dense and dense sand.



Figure 1: Group of three pile model on which experiments was don

4. Experimental Procedure

Vertical Load Test

Due to specific time limit and depending on the availability of the instruments in the laboratory the experimental investigation has been restricted to vertical pile load test only. However a good number of tests have been carried-out on a bent pile groups.

Pile group test: Test on Three pile group : At first a sand layer of 200 mm has to be placed by rain fall method with constant height of fall (Below the tips of the pile group the soil medium in this case, sand of equal to twice the minimum dimension of the pile group is essential for failure plane to be developed properly, without interference of the tank base, but in this investigation throughout only 200 mm of sand layer could be provided due to practical limitations of the tank) piles were placed in vertical position above the sand layer with the help of spacer to achieve the required spacing and the pile cap is mounted on piles. Horizontality of pile cap was censured

by plate bubble. Sand will be poured into tank in the same way as explained earlier Group of three piles of different angle of bent i.e. 6° , 15° , & 30° shall be tested for three different soil medium for different spacing of piles i.e. $s/d = 2$, $s/d = 4$, $s/d = 6$, $s/d = 8$. The load will applied by a screw jack and will measured by a proving ring having calibration of 1 div. =1.447 kg. Three numbers dial gauges of least count 0.01 mm shall be placed in three opposite side of the pile on the pile cap for measuring the settlement at different loading increment the investigations have to be done for different densities of sand such as loose, medium and dense confirmed by varying the height of fall of sand for different spacing & angle of bent of piles ($s/d = 2, 4, 6$ & 8 , $\beta = 0^\circ, 6^\circ, 15^\circ$ & 30° respectively).

The load versus settlement curve and ultimate loads have to be obtained from the above experiments. The ultimate load capacities have to be obtained from the load displacement curve.

Here the procedure will be same as in the different pile group test.

Load versus settlement curve have to be shown by graphical representation. The ultimate load capacities will be obtained from the load displacement curve.

5. Presentation of Results & Discussions

General: In the present investigation locally available cohesion less soil has been used as soil medium and placement of soil has been made by rainfall method.

Throughout the investigation identical method for placement of soil was used for different densities. For a particular density viz. loose or medium or dense. The variation being marginal for each case for that particular density. Relevant soil properties required for the theoretical analysis and to represent the particular soil, details of test results are presented appendix –A. As the nature of problem is three dimensional, tri-axial test was performed to get the value of angle of shearing resistance (Φ).

Considering the main objective of present investigation i.e. to know the behavior of bent piles and pile groups under vertical load, a series of tests on group of three piles, three piles, four piles and five piles have been carried out. Due to practical limitations of the size of the tank, capacity of the loading arrangement and volume of sand to be handled, spacing of pile has been restricted to $2d, 4d, 6d$ & $8d$.

Load Settlement Behaviour of Group Three Pile

Group of Three Piles:

The load settlement behavior of three piles group for different soil densities, different slenderness ratio (L/d), and for space-diameter ratio= 2 with various angle of bent. From fig and table, it is observed that the load settlement behavior for three pile group is dependent on various parameters like slenderness ratio, density of soil medium and angle of bent (β).

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - LOOSE

SLANDERNESS RATIO (L/d) = 10, $S/d=4$ GROUP OF THREE PILES

$\beta=0^\circ$		$\beta=6^\circ$		$\beta=15^\circ$		$\beta=30^\circ$	
LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)
0	0	0	0	0	0	0	0
5	0.33	5	0.67	5	0.92	5	1.50
10	0.84	10	1.50	10	2.17	10	3.76
15	2.00	15	2.84	15	3.84	15	8.35
20	3.50	20	4.68	20	6.18	18.33	20
25	5.44	25	7.01	25	9.35	Q(ULT)=11.39kg	
30	8.01	30	10.02	30	13.36		
35	10.35	35	13.69	35	13.69		
40	15.20	39.67	20	35.33	20		
42.83	20	Q(ULT)=27.17kg		Q(ULT)=22.15kg			
Q(ULT)=32.78kg							

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - LOOSE

SLENDERNESS RATIO (L/d) = 20, S/d=4 GROUP OF THREE PILES


$\beta=0^{\circ}$		$\beta=6^{\circ}$		$\beta=15^{\circ}$		$\beta=30^{\circ}$	
LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)
0	0.06	0	0	0	0	0	0
5	0.17	5	0.38	5	0.75	5	0.84
10	0.50	10	1.08	10	1.67	10	2.00
15	0.83	15	1.92	15	3.17	15	3.51
20	1.33	20	2.83	20	4.67	20	5.68
25	2.00	25	4.17	25	6.51	25	9.52
30	2.92	30	5.67	30	9.35	30	15.36
35	3.84	35	7.51	35	13.36	33	20
40	4.98	40	9.85	39	20	Q(ULT)=20.75kg	
45	6.18	45	13.69	Q(ULT)=29.15kg			
50	7.68	48.5	20				
55	9.60	Q(ULT)=38.79kg					
60	11.85						
65	14.94						
70	18.45						
75	20						
76.3	0.06						
Q(ULT)=53.17kg							

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - LOOSE

SLENDERNESS RATIO (L/d) = 40, S/d=4 GROUP OF THREE PILES

$\beta=0^{\circ}$		$\beta=6^{\circ}$		$\beta=15^{\circ}$		$\beta=30^{\circ}$	
LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)
0	0	0	0	0	0	0	0
5	0	5	0.25	5	0.84	5	0.92
10	0	10	0.67	10	2.17	10	2.17
15	0.17	15	1.34	15	3.67	15	3.84
20	0.33	20	2.01	20	5.51	20	6.18
25	0.66	25	2.92	25	7.51	25	9.35
30	1.17	30	3.84	30	9.68	30	13.36
35	1.67	35	4.83	35	12.85	35	13.69
40	2.17	40	6.01	40	18.03	35.33	20
45	3.00	45	7.52	40.9	20	Q(ULT)=26.07kg	
50	3.67	50	9.35	Q(ULT)=32.14kg			
55	4.67	55	12.02				
60	5.59	60	16.7				
65	6.84	61	20				
70	8.26	Q(ULT)=46.15kg					
75	9.69						
80	11.69						
85	14.95						
87.7	20						
Q(ULT)=68.17kg							

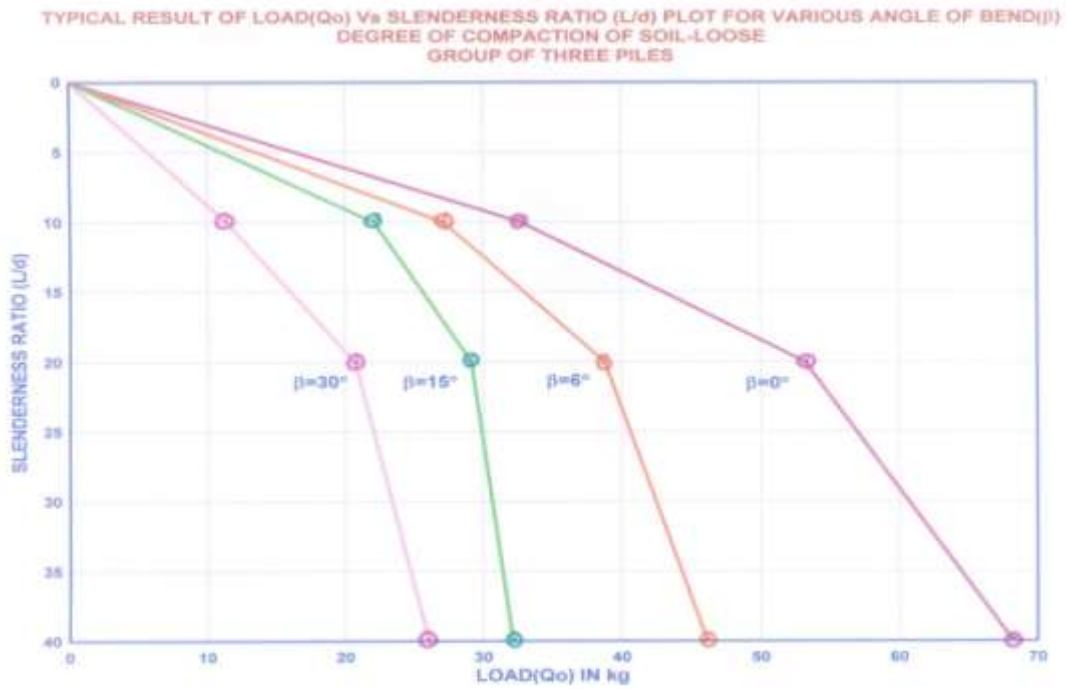

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - MEDIUM DENSE

SLENDERNESS RATIO (L/d) = 10, S/d=4 GROUP OF THREE PILES

$\beta=0^\circ$		$\beta=6^\circ$		$\beta=15^\circ$		$\beta=30^\circ$	
LOAD	SETTLE	LOAD	SETTLE	LOAD	SETTLE	LOAD	SETTLE
0	0	0	0	0	0	0	0
5	0.69	5	0.33	5	0.67	5	1.17
10	1.47	10	0.84	10	1.50	10	3.00
15	2.34	15	2.00	15	2.84	15	6.01
20	3.33	20	3.50	20	4.68	20	11.02
25	4.68	25	5.44	25	7.01	25	17.87
30	6.35	30	8.01	30	10.02	26.5	20
35	8.35	35	10.35	35	13.69	Q(ULT)=18.21kg	
40	10.86	40	15.20	39.67	20	Q(ULT)=27.18kg	
45	13.61	42.83	20	Q(ULT)=32.17kg			
50	16.87						
52.34	20						
Q(ULT)=37.19kg							

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - MEDIUM DENSE

SLENDERNESS RATIO (L/d) = 20, S/d=4 GROUP OF THREE PILES


$\beta=0^\circ$		$\beta=6^\circ$		$\beta=15^\circ$		$\beta=30^\circ$	
LOAD	SETTLE	LOAD	SETTLE	LOAD	SETTLE	LOAD	SETTLE
0	0	0	0	0	0	0	0
5	0.22	5	0.25	5	0.67	5	0.92
10	0.60	10	0.67	10	1.50	10	2.17
15	1.00	15	1.34	15	2.84	15	3.84
20		20	2.01	20	4.68	20	6.18
25	1.50	25	2.92	25	7.01	25	9.35
30	2.17	30	3.84	30	10.02	30	13.36
35	2.84	35	4.83	35	13.69	35	13.69
40	3.67	40	6.01	39.67	20	35.33	20
45	4.68	45	7.52	Q(ULT)=28.24kg		Q(ULT)=23.89kg	
50	5.54	50	9.35				
55	7.01	55	12.02				
60	8.35	60	16.70				
65	12.3	61	20				
70	15.3	Q(ULT)=49.39kg					
74.67	20						
Q(ULT)=58.84kg							

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - MEDIUM DENSE

SLENDERNESS RATIO (L/d) = 40, S/d=4 GROUP OF THREE PILES

$\beta=0^\circ$		$\beta=6^\circ$		$\beta=15^\circ$		$\beta=30^\circ$	
LOAD	SETTLE	LOAD	SETTLE	LOAD	SETTLE	LOAD	SETTLE
0	0	0	0	0	0	0	0
5	0	5	0.06	5	0.38	5	0.75
10	0	10	0.17	10	1.08	10	1.67
15	0.17	15	0.50	15	1.92	15	3.17
20	0.33	20	0.83	20	2.83	20	4.67
25	0.66	25	1.33	25	4.17	25	6.51
30	1.17	30	2.00	30	5.67	30	9.35
35	1.67	35	2.92	35	7.51	35	13.36
40	2.17	40	3.84	40	9.85	39	20
45	3.00	45	4.98	45	13.69	Q(ULT)=29.14kg	
50	3.67	50	6.18	48.4	20		
55	4.67	55	7.68	Q(ULT)=38.04kg			
60	5.59	60	9.60				
65	6.84	65	11.85				
70	8.26	70	14.94				
75	9.69	75	18.45				
80	11.69	76.3	20				
85	14.95	Q(ULT)=51.20kg					
87.7	20						
Q(ULT)=70.27kg							

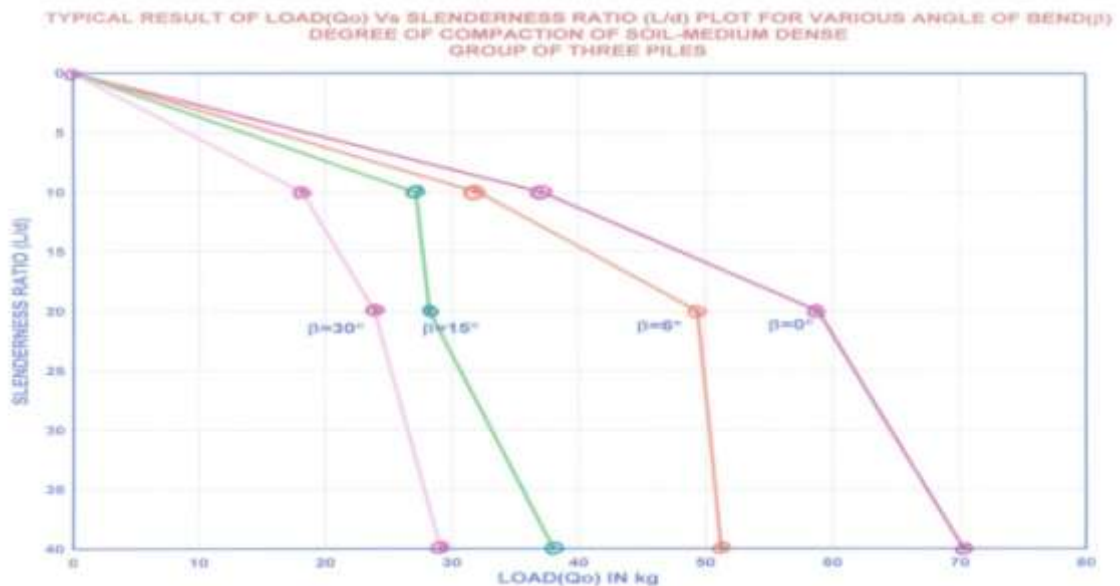

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - DENSE

SLENDERNESS RATIO (L/d) = 10, S/d=4 GROUP OF THREE PILES

$\beta=0^\circ$		$\beta=6^\circ$		$\beta=15^\circ$		$\beta=30^\circ$	
LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)
0	0	0	0	0	0	0	0
5	0.17	5	0.50	5	0.84	5	1.17
10	0.33	10	1.17	10	1.84	10	2.39
15	0.66	15	1.84	15	3.26	15	3.94
20	1.08	20	2.42	20	4.68	20	5.76
25	1.50	25	3.50	25	6.51	25	7.95
30	2.00	30	4.68	30	8.52	30	11.36
35	2.67	35	5.85	35	11.19	32.3	20
40	3.34	40	7.27	40	15.53	Q(ULT)=23.00kg	
45	4.17	45	8.77	42	20		
50	4.92	50	10.86	Q(ULT)=28.19kg			
55	5.84	55	13.19				
60	6.50	60	16.54				
65	7.93	62.65	20				
70	8.35	Q(ULT)=42.84kg					
75	10.85						
80	12.85						
85	15.36						
88	20						
Q(ULT)=70.35kg							

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - DENSE

SLENDERNESS RATIO (L/d) = 20, S/d=4 GROUP OF THREE PILES


$\beta=0^{\circ}$		$\beta=6^{\circ}$		$\beta=15^{\circ}$		$\beta=30^{\circ}$	
LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)
0	0	0	0	0	0	0	0
5	0.17	5	0.25	5	0.33	5	0.84
10	0.33	10	0.67	10	1.00	10	1.84
15	0.66	15	1.34	15	2.17	15	3.26
20	1.08	20	2.01	20	3.67	20	4.68
25	1.50	25	2.92	25	5.42	25	6.51
30	2.00	30	3.84	30	7.51	30	8.52
35	2.67	35	4.83	35	10.02	35	11.19
40	3.34	40	6.01	40	12.86	40	15.53
45	4.17	45	7.52	44.7	20	42	20
50	4.92	50	9.35	Q(ULT)=32.10kg		Q(ULT)=26.07kg	
55	5.84	55	12.02				
60	6.50	60	16.70				
65	7.93	61	20				
70	8.35	Q(ULT)=47.29kg					
75	10.85						
80	12.85						
85	15.36						
88	20						
Q(ULT)=73.82kg							

TYPICAL LOAD Vs SETTLEMENT PLOT FOR VARIOUS ANGLE OF BEND

TYPE OF SOIL: - DENSE

SLENDERNESS RATIO (L/d) = 40, S/d=4 GROUP OF THREE PILES

$\beta=0^{\circ}$		$\beta=6^{\circ}$		$\beta=15^{\circ}$		$\beta=30^{\circ}$	
LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)	LOAD(kg)	SETTLE(mm)
0	0	0	0	0	0	0	0
10	0.41	10	0.75	10	0.75	10	1.08
20	1.36	20	2.00	20	1.84	20	2.83
30	2.33	30	3.50	30	3.67	30	5.67
40	3.60	40	5.51	40	6.01	40	9.85
50	5.01	50	8.09	50	9.10	45	13.69
60	6.84	60	12.19	60	13.86	48.4	20
70	9.01	70	20	68.4	20	Q(ULT)=39.87kg	
80	11.69	Q(ULT)=55.39kg		Q(ULT)=48.18kg			
90	16.36						
93.4	20						
Q(ULT)=82.11kg							

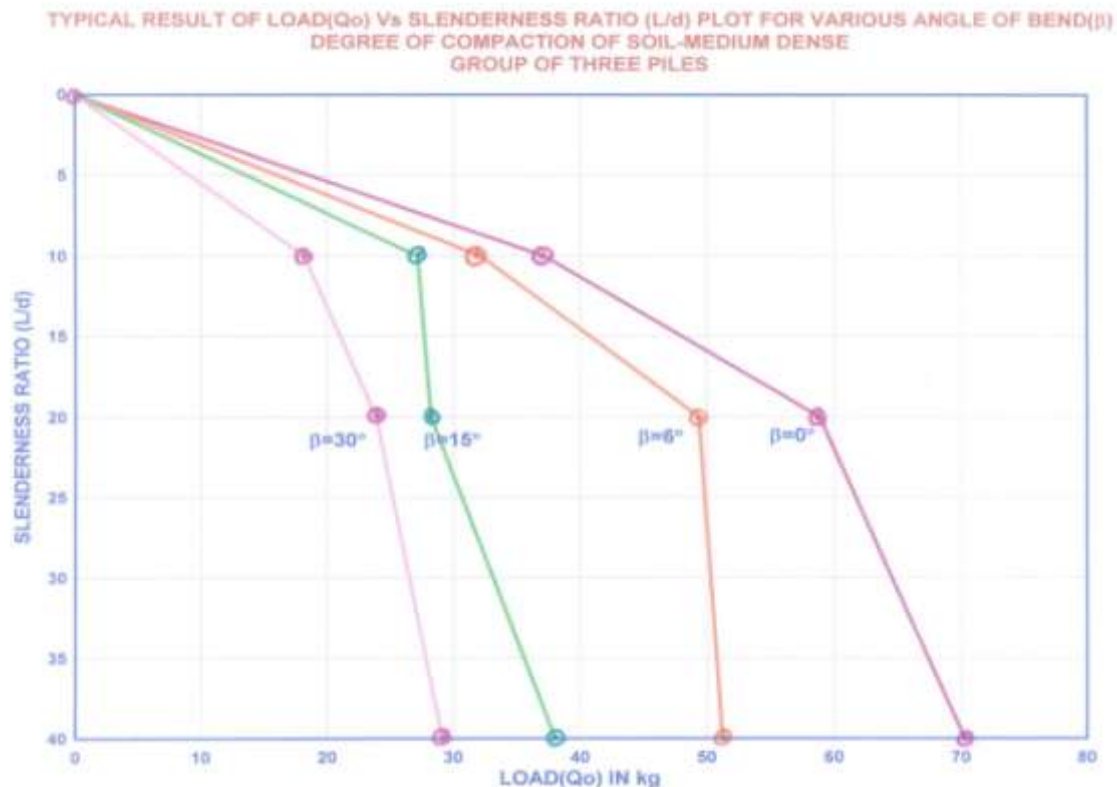

6. Conclusions

It is noted that the behavior of various bent pile tests with respect to load carrying capacity is imaging good and this confirms that contrary to general belief the bent piles have relatively good load carrying capacity. In all cases there is load reduction in capacity with respect to the straight vertical piles.

It was observed that the variation in load reductions are less with respect to variation in angle of bent i.e. 0° to 15° but the load reduction is large when angle of bent is greater than 15° (i.e. 30°). Thus, as the bend increases, the load carrying capacity decreases.

The ultimate load carrying capacity is lesser cohesion-less soil for the same type of pile (i.e. same L/d ratio & same angle of bent) than dense soil. But the percentage reduction in load carrying capacity of pile is lesser in loose soil as compared to dense soil. In case of loose soil percentage reduction in load bearing capacity is 33% to 37% and in case of dense soil percentage reduction in load bearing capacity is 38% to 45%.

A bent pile having sharp bent gives more reduction in capacity as compared to piles having long sweep. On the other hand it can be stated that a sharp bend or knuckle is more detrimental than a long sweep.

The load carrying capacity of initially bent piles has great influence of on slenderness ratio. It is noted that the increase in L/d ratio increases the ultimate load carrying capacity. The percentage reduction in ultimate load carrying capacity is lesser for higher slenderness ratio.

It is observed that the variation of theoretical results and experimental results are marginal. In group of three piles theoretical load carrying capacity of pile is higher than that of experimental values. It is observed that for three pile group the variation are within the range of 2.75% to 12.5%. These variations incorporate all variables e.g. slenderness ratio (L/d), angle of bent (β) and change of degree of compaction of soil.

The objective of this detail experimental study on initially bent model piles made of wood is to know the behavior of pile capacity under vertical load. The behavior of such piles for a range of loading and pile conditions has been presented. This has enabled areas of importance to be identified that will provide a basis for further laboratory, field and analytical study. It is clear that much in foundation or much investigation still has to be done before a full understanding of the behavior of the bent piles can be achieved.

References

- [1] Desai, C.S.(1974) "Numerical Design-Analysis for piles in sand" Jnl. Geot. Engg. Div., ASCE, Vol-100No.GT6:613-635.
- [2] Desai, C.S.& Appel, G.C.(1976) "3-D Analysis of laterally loaded structures" 2nd Int. Conf. Num. methods in Geomechs, Blacksburg. ASCE Vol-1:405-418.
- [3] Duggal, A.K., Associate professor, NITTTR, Chandigarh "Pile foundations".
- [4] Brandtzaeg, A & Herboe, E 1957, "Buckling tests of slender steel piles in soft, Quick clay" Proc.4th Int. Conf. S.M.&F.E. Vol. 2:19-23
- [5] Bjerrum, L (1957) "Norwegian Experiences with steel piles to rock" Geot. Vol. 7: 73-96.

Author Profile



Ravi Kumar received the M.E Degree in Construction Technology of Management (Civil Engg.) from NITTTR, Chandigarh in 2013. He is now lecturer in Civil Engg. Department at Government Polytechnic Katihar, under Department of Science and Technology Bihar, Patna.

