





UPS is distinguished from conventional PWS in that it

1. Provides runtime profiling, which in effect optimizes the personalization utility while respecting users' privacy requirements;
2. Allows for customization of privacy needs; and
3. Does not require iterative user interaction.

Author proposes a privacy-preserving personalized web search framework UPS, which can generalize profiles for each query according to user-specified privacy requirements. Relying on the definition of two conflicting metrics, namely personalization utility and privacy risk, for hierarchical user profile, we formulate the problem of privacy-preserving. Also use RSA algorithm for encryption and decryption the data, here client sends encrypted queries for the server and that of server sends decrypted results for the client and clients forms outline profile building as  $g_0$ , and also outline profile generalization.

#### 4. Algorithm

##### 1) Proposed Algorithm

Let,

The system  $S$  is represented as:  $S=G, S, R, R_r$  (1)

•Generation of User Profile:  $G$ =Generating user profile

Here, user issues query  $q$ , proxy generates user profile  $P$ , output of user profile  $G_i$ .  $Q$ =issues Query on client

$G_i$ =Output of profile

•Query and User Profile Sent to PWS:

PWS=Personalized Web Search=PWS1 request= $r_1, r_2, \dots, r_n$ .

•Personalized Search Result with profile and sent to proxy:  $R$ =result set

$Pr$ =Proxy= $pr_1$

•Present Search result or re-rank:  $R_r$ =Re-ranking

$D$ =display search result

##### 2) RSA Algorithm

For Efficient encryption and decryption operations:

In RSA states that “computing  $M^e \pmod n$  requires at most  $2 \cdot \log_e(e)$  multiplication and  $2 \cdot \log_e(e)$  divisions” if we use their procedure below. It is important for us to know the amount of steps it would take a computer to encrypt the message so we can see if a method is fast and efficient, or not. We now “exponentiations by repeated squaring and multiplication”:

Step1. Let  $e_k e_{k-1} \dots \dots e_1 e_0$ . . . be the binary representation of  $e$ .

Step2. Set the variable  $C$  to 1.

Step3. Repeat steps 3a and 3b for  $i = k, k - 1, \dots, 0$ :

Step3a. Set  $C$  to the remainder of  $C^2$  when divided by  $n$ .

Step3b. If  $e_i = 1$  then set  $C$  to the remainder of  $C \cdot M$  when divided by  $n$ .


Step4. Halt. Now  $C$  is the encrypted form of  $M$ .

There are more efficient procedures out there, but this one is good too. Also, since decryption follows the same identical procedure as encryption, we can implement the whole operation on a few integrated chips. According to the authors of RSA, “the encryption time per block increases no faster than the cube of the number of digits in  $n$ .”

#### 5. Results

**Table 1:** Time per User Profile

Query Type	Existing System	Propose system
Distinct Query	689	600
Medium Query	756	702
Ambiguous Query	1232	1123

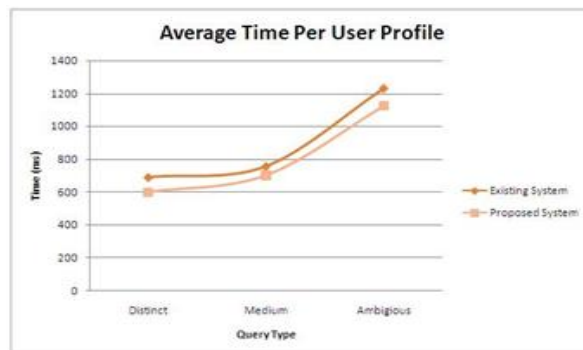


**Figure 2:** Average Time per User Profile

In our graph, our system take less response time in user profile compare to existing system time.

**Table 2:** Average Accuracy of a Query Result

Query Type	Existing System	Propose system
Distinct Query	93%	96%
Medium Query	85%	90%
Ambiguous Query	76%	82%

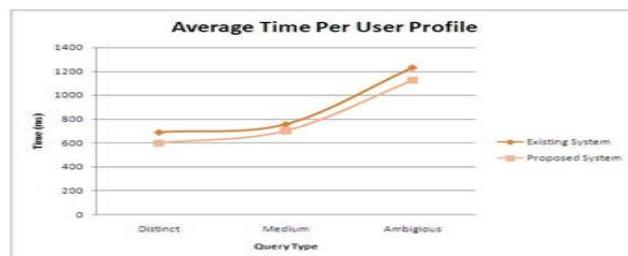

**Figure 3:** Average Accuracy of Query Result

#### 6. Conclusion

The framework displayed a client side protection insurance structure called UPS for personalized web search. UPS could conceivably be embraced by any PWS that catches client profiles in a progressive scientific categorization. The system permitted clients to detail modified security necessities by means of various leveled profiles and UPS likewise performed online generalization on client profiles to ensure that individual protection without compromising the search quality. Author proposed two ravenous algorithms, in particular Greedy DP and Greedy IL, for the online generalization. Also propose metric prediction using ranking search techniques which include p-click and g-click, here RSA algorithm is used for the encryption and decryption and also we used query classification and profile classification. A metric prediction algorithm is for predict the performance of UPS framework. This metric predicts the search quality of the query on a generalized profile. We

transform the utility prediction problem to the analysis of distinguishing power of a given query on a generalized profile. Similar assumption has been made in to model utility, but this metric cannot be used in our problem settings, as have a profile with hierarchical structure instead of flat one.

## References

- [1] X. Shen, B. Tan, and C. Zhai, "Implicit User Modeling for Personalized Search," Proc. 14th ACM Intl Conf. Information and Knowledge Management (CIKM), 2005.
- [2] K. Ramanathan, J. Giraudi, and A. Gupta, "Creating Hierarchical User Profiles Using Wikipedia," HP Labs, 2008.
- [3] B. Tan, X. Shen, and C. Zhai, "Mining Long-Term Search History to Improve Search Accuracy," Proc. ACM SIGKDD Intl Conf. Knowledge Discovery and Data Mining (KDD), 2006.
- [4] M. Spertta and S. Gach, "Personalizing Search Based on User Search Histories," Proc. IEEE/WIC/ACM Int'l Conf. Web Intelligence (WI), 2005.
- [5] Y. Xu, K. Wang, B. Zhang, and Z. Chen, "Privacy-Enhancing Personalized Web Search," Proc. 16th Intl Conf. World Wide Web (WWW), pp. 591-600, 2007.
- [6] Z. Dou, R. Song, and J. -R. Wen, "A Large-Scale Evaluation and Analysis of Personalized Search Strategies," Proc. Intl Conf. World Wide Web (WWW), pp. 581-590, 2007.
- [7] F. Qiu and J. Cho, "Automatic Identification of User Interest for Personalized Search," Proc. 15th Intl Conf. World Wide Web (WWW), pp. 727-736, 2006.
- [8] P. A. Chirita, W. Nejdl, R. Paiu, and C. Kohlschutter, "Using ODP Metadata to Personalize Search," Proc. 28th Ann. Intl ACM SIGIR Conf. Research and Development Information Retrieval (SIGIR), 2005.
- [9] D. Xing, G. -R. Xue, Q. Yang, and Y. Yu, "Deep Classifier: Automatically Categorizing Search Results into Large-Scale Hierarchies," Proc. Intl Conf. Web Search and Data Mining (WSDM), pp. 139-148, 2008.
- [10] C. C. Chen, M. C. Chen, PVA: A self-adaptive personal view agent, Journal of Intelligent Information systems, 18:2/3, pp 173-194, 2002.
- [11] H. R. Kim and P. K. Chan, Learning implicit user interest hierarchy for context in personalization, Proc. of International conference on Intelligent User Interfaces (IUI), Miami, Florida, 2003.
- [12] D. Godoy and A. Amandi, User profiling for web page filtering, IEEE Internet computing, July-August 2005.
- [13] K. Sugiyama, K. Hatano, M. Yoshikawa, Adaptive web search based on user profile constructed without any effort from users, WWW 2004.
- [14] Y. Xu, B. Zhang, Z. Chen and K. Wang, Privacy enhancing personalized web search, WWW 2007.
- [15] H. Dai et. al, Detecting online commercial intention, WWW 2006.
- [16] N. Nanas, V. Uren and A. D. Roeck, Building and applying a concept hierarchy representation of a user profile, SIGIR 2003.
- [17] Trajkova J. and Susan Gauch, Improving Ontology based user profiles, Proceedings of RIAO 2004, University of Avignon, France.
- [18] P. A. Chirita, W. Nejdl, R. Paiu, C. Kohlschutter, Using ODP data to personalize search, SIGIR 2005.
- [19] E. Gabrilovich and S. Markovich, Overcoming the brittleness bottleneck with Wikipedia: Enhancing Text Categorization with Encyclopedic Knowledge, Proc. of the AAAI conference, 2006.
- [20] Z. Ma, G. Pant and O. R. L. Sheng, Interest based personalized search, ACM transactions on Information systems, Vol. 25, no. 1, February 2007.
- [21] Susan Gauch et. al, User profiles for personalized information access, Ch. 2, "The adaptive web", Springer LNCS 4321.
- [22] Ahu Sieg, Bamshad Mobasher, Robin Burke, Web search personalization with ontological user profiles, CIKM 2007